



# Acusti·fi™

## Material Specifications

### Description

A elegant rigid felt with matte finish designed to absorb acoustical noise. Tackable, impact resistant, bacteria resistant, moisture resistant, installation friendly.

### Application

Offers acoustical clarity when introduced within an environment in applications for walls, ceilings, partitions and other design solutions.

### Size / Weight

3/8" (9mm) x 4ft x 8ft (+/-) sheet  
8.5 lbs / sheet (3.85 kg)

### Material Content


100% Polyester, min. 50% post-consumer recycled content, Formaldehyde free, NO-VOC

### Acoustical Range

ASTM C 423 - SA = 0.30 to 0.98  
ASTM E 1264 - NRC = 0.30 to 1.0

### Flammability

ASTM E-84 Class A

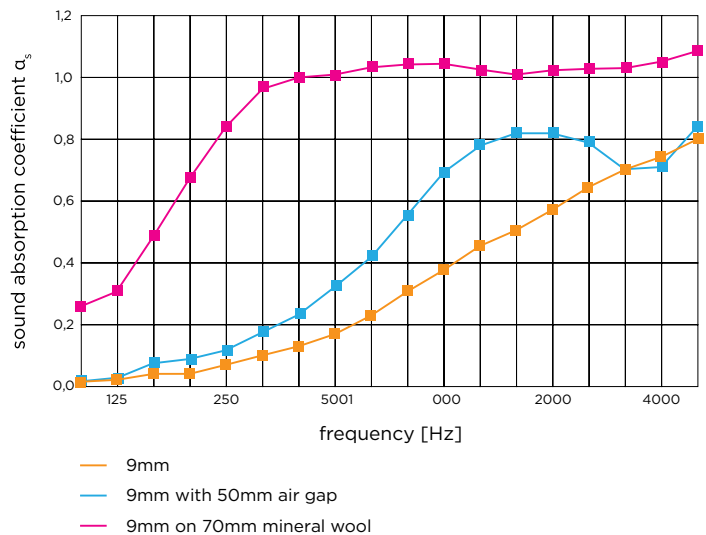

### Maintenance

For routine maintenance lightly dust with a soft brush or vacuum.

For light marks or stains:

\*\*Avoid excessive amounts of water.

- Gently clean excess with sponge or cloth.
- Sponge with a small amount of carpet shampoo working circularly from well outside the stain towards the center.
- Sponge afterward with warm damp cloth and mop excess water with a clean dry cloth or sponge.
- Allow to dry.
- Brush gently with a soft brush.
- Repeat as necessary.