


GUIDE TO FRAME MEASURING



GUIDE TO FRAME MEASURING

MEASURING INSIDE TO INSIDE

Precise measurements are crucial to ensure the right amount of tension. While frames may differ by manufacturer, the appropriate measurement is width by length. One method is to measure the outer edge of the channel to outer edge of the opposite channel, as shown below.

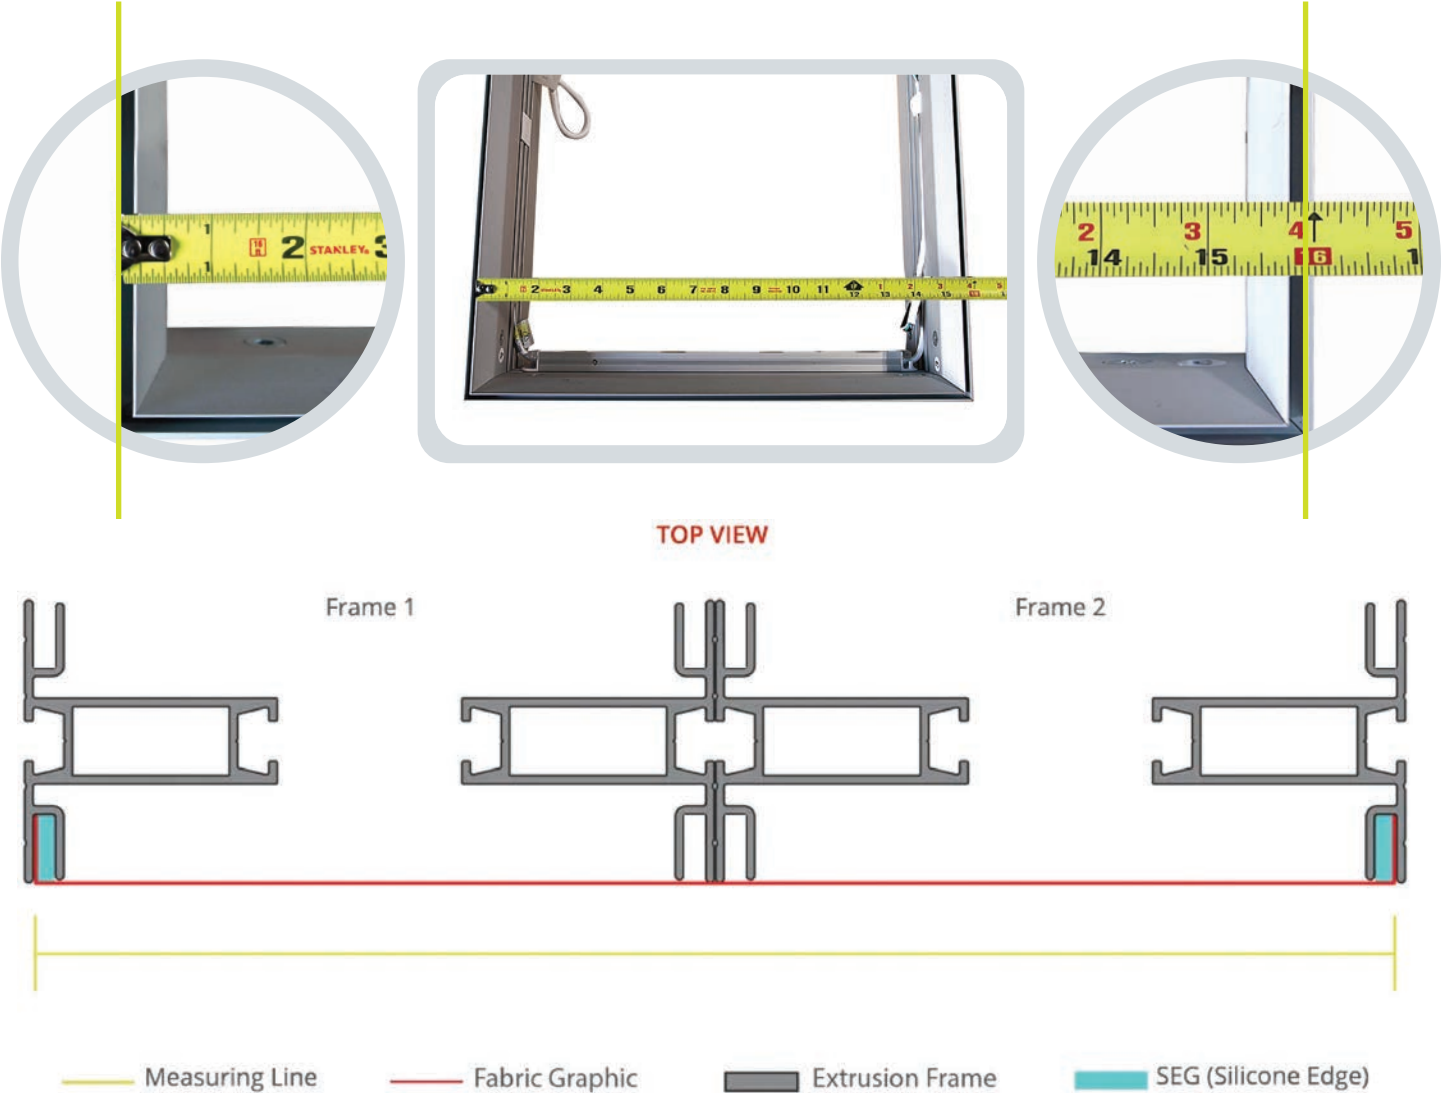


GUIDE TO FRAME MEASURING

MEASURING OUTSIDE TO OUTSIDE

Another method is measure the total frame. In this case, measure the outer edge of the frame to outer edge of the opposite frame, as shown below.



TOP VIEW

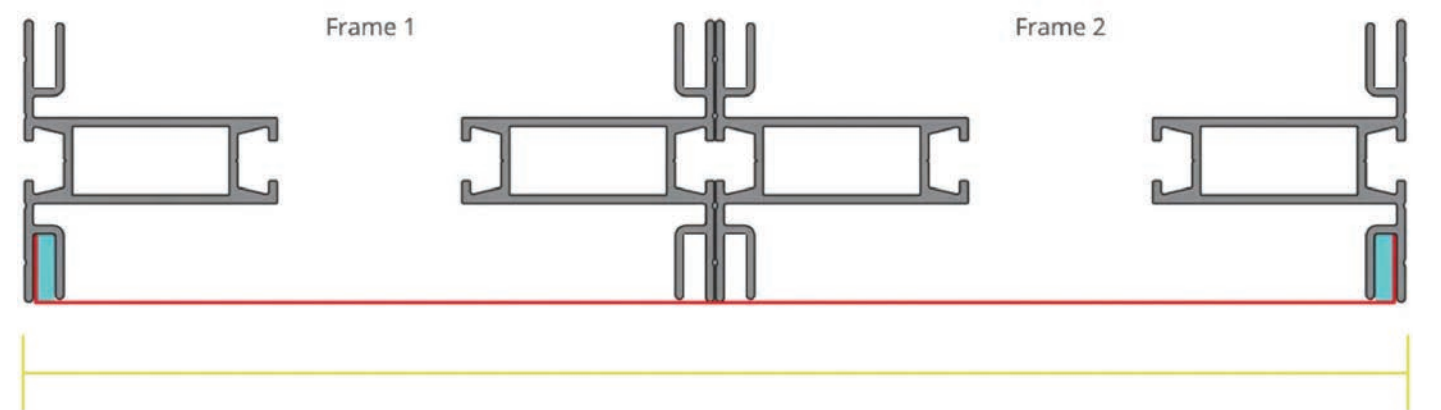

— Measuring Line
 — Fabric Graphic
 Extrusion Frame
 SEG (Silicone Edge)



WANT US TO MEASURE FOR YOU?

Using our guide, measuring your frame is easy. You can simply provide information on your frame system and the measurements of the graphic(s) you need. We will send you a layout to design within and once produced, we send you photos of the finished

graphic on a table, finished to your specifications. Need a higher level of service? You can provide your frame for full-service assembly, fit and finish. We assemble the frame(s), fit the silicon edge graphics (SEG) and send you photographs.

FABRIC OPTIONS

We offer six fabric options for illuminated SEG frames and non-illuminated SEG frames, and help you choose the right one for your frame size and desired result.

POWER STRETCH

- Used for non-illuminated SEG frames.
- 8oz material for indoor, single sided use.
- Available up to 120" wide.

ECLIPSE

- Used for non-illuminated SEG frames.
- Includes black backside liner to minimize shadowing.
- 6oz material for indoor, single sided use.
- Available up to 120" wide.

BACKLIT TEXTILE

- Used for illuminated SEG frames.
- 8oz material for indoor, single sided use.
- Available up to 120" wide.

PANOPTIC ECLIPSE BLOCKOUT


- Used for non-illuminated SEG frames.
- 6.8oz material for indoor, single sided use
- Available up to 192" wide

PANOPTIC SOFT KNIT

- Used for non-illuminated SEG frames.
- 6.5oz material for indoor, single sided use
- Available up to 192" wide


TENSION FABRIC PRINTING FOR SEG FRAME SYSTEMS

We specialize in dye-sublimation printing on a variety of fabrics and finish with a thin, yet durable silicone strip stitched around the perimeter to ensure a secure fit within the frame channel and proper tension for the fabric. We support SEG printing for beMatrix, Alluvision and AGAM framing systems. Below are steps for how to apply and remove graphics:

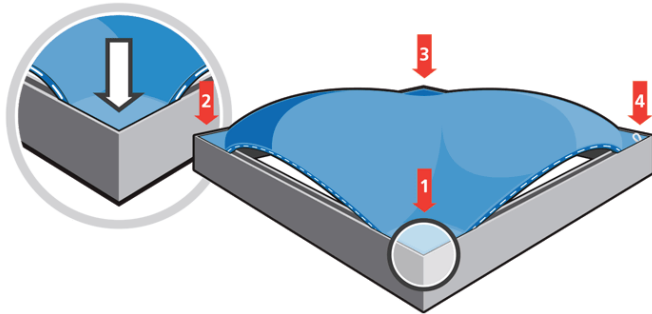


STEP 1

Push the SEG bead into each corner of the frame (1-4) with your thumb.

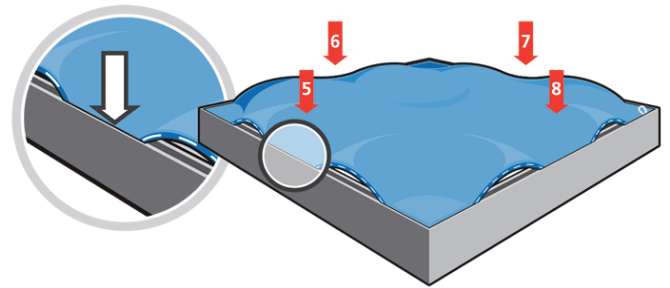


STEP 2

Push the SEG bead into the middle of the run (5-8) and work your way around the perimeter of the frame until all beading is pushed in properly.

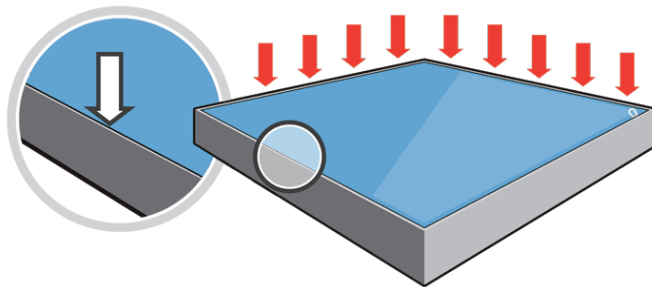

STEP 3

If necessary; Go around the perimeter again to ensure beading is secure in the extrusion profile.

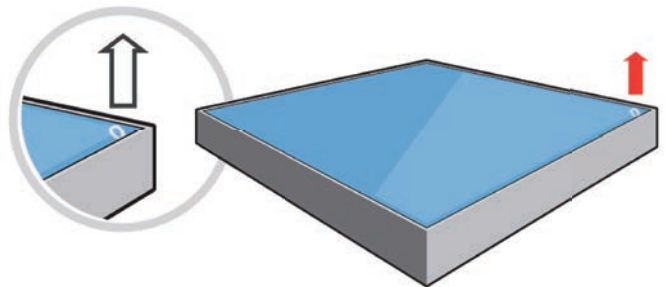

REMOVAL

Use the pull tab located on the graphic and gently pull the graphic from the frame, going around the perimeter.